

Mod. LOWARA	NSCE 50-160/55	5,5 KW
-------------	----------------	--------


portata
flow rate
zuströmen

prevalenza totale	240 kPa
total static pressure	
förderhöhe	

prevalenza utile
available static pressure
externe Pressung

0-10 bar

0-10 bar

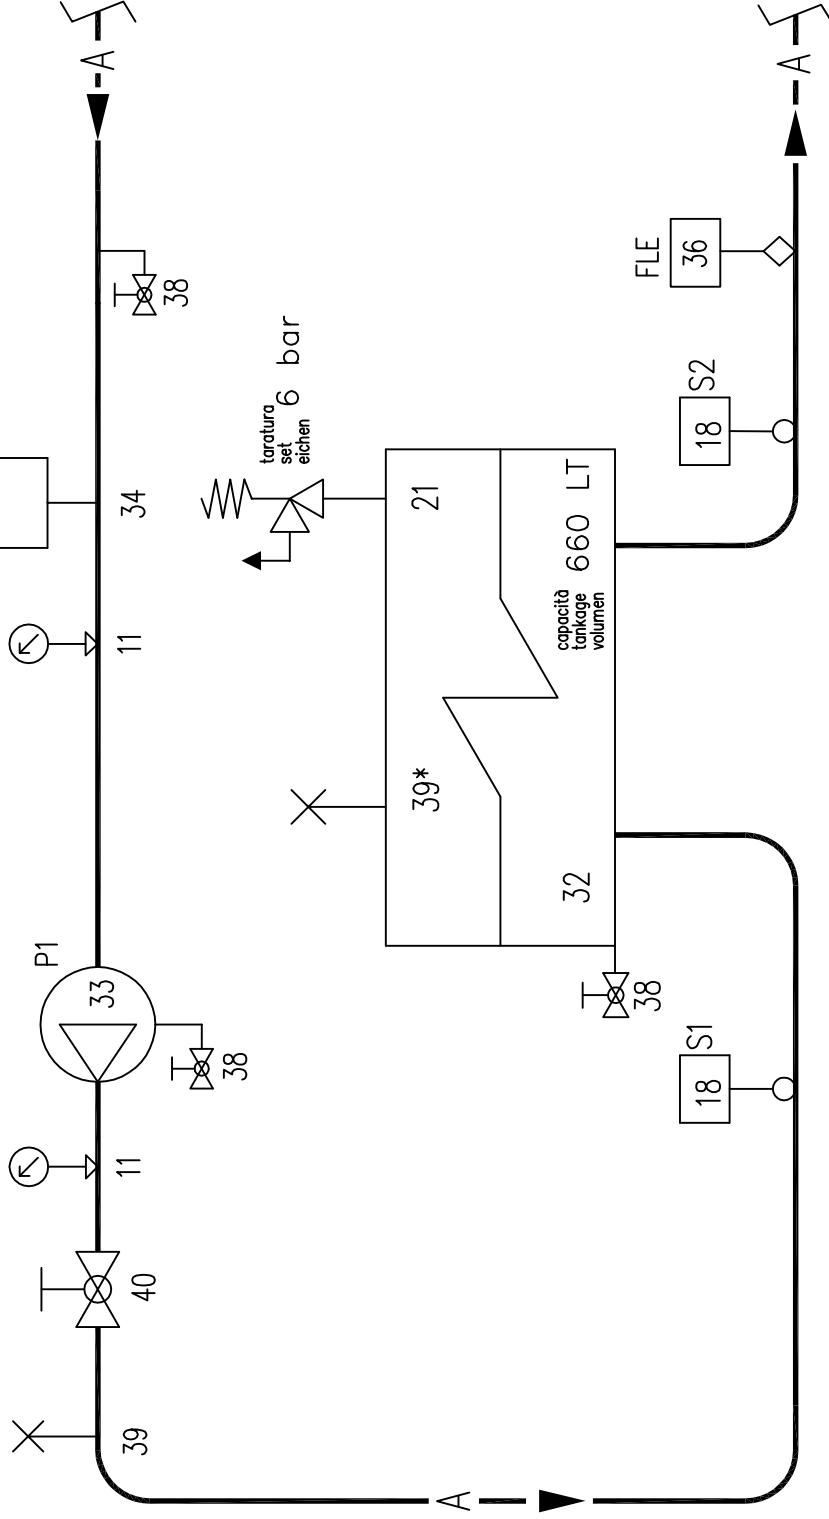

NOTE - NOTES - ANMERKUNG

1)* accessori su richiesta:

DIAMETRO TUBAZIONI PIPE DIAMETER ROHRLEITUNGSQUERSCHNITTE	mod. 342		
	A	B	C
	3"	-	-

00	26/09/2018	Prima emissione	
REV.	DATA		
F. vietato la riproduzione e diffusione non autorizzata			

GAS	—	FLUID Eth. Glycol 35%
PRESSIONE AMMISSIBILE (BP/AP) ALLOWABLE PRESSURE (1P/4P) ZULASSIGER DRUCK (ND/HD)		6 bar

118185	CLIENTE CLIENT KUNDE	C009851
--------	----------------------------	---------

DENOMINAZIONE DENOMINATION BEZEICHNUNG	SCLYJ-F 342 PAC1
DIS. N. DWG. N. ZHW. N.	W218185 COMMESSA ORDER BEST.

written authorization


F.Romagnosi
FIRMA

					This drawing cannot be

TO MODIFICA

[illegible]

CIRCUITO IDRAULICO PIPING DIAGRAM



KÄLTE KLIMA srl
Via dell'Industria, 17 ARZERGRANDE (PD) - Italy
tel. 049 5800981 r.a. - fax 049 5800997